



Key Features

- Full range speaker
- 3" (77 mm) steel basket diameter
- 10 watts, 8 ohm, 86 dB SPL
- 1" copper voice coil, paper former
- Paper cone, foam surround
- 3.6 ounce ferrite magnet


Primary Specifications

| | |
|---|--------------|
| Size, Nominal (inch & mm) | 3" (77 mm) |
| Nominal Impedance (Z) (Ω) | 8 |
| Rated Power IEC268-5 (W) | 10 |
| Sensitivity (dB SPL) ¹ (@1W/1 m) | 86 |
| Frequency range (Hz) | 100 – 20,000 |
| Resonant Frequency (Fs) (Hz) | 130 |

Product Description

This full range speaker provides a reliable weather-resistant solution for voice, music, and gaming audio projects. A heavy-duty ferrite magnet and treated paper cone supports this driver's powerful outputs, and a protective foam surround and gasket ensure this driver's longevity despite prolonged exposure to water and moisture-filled environments.

Sensitivity Curve

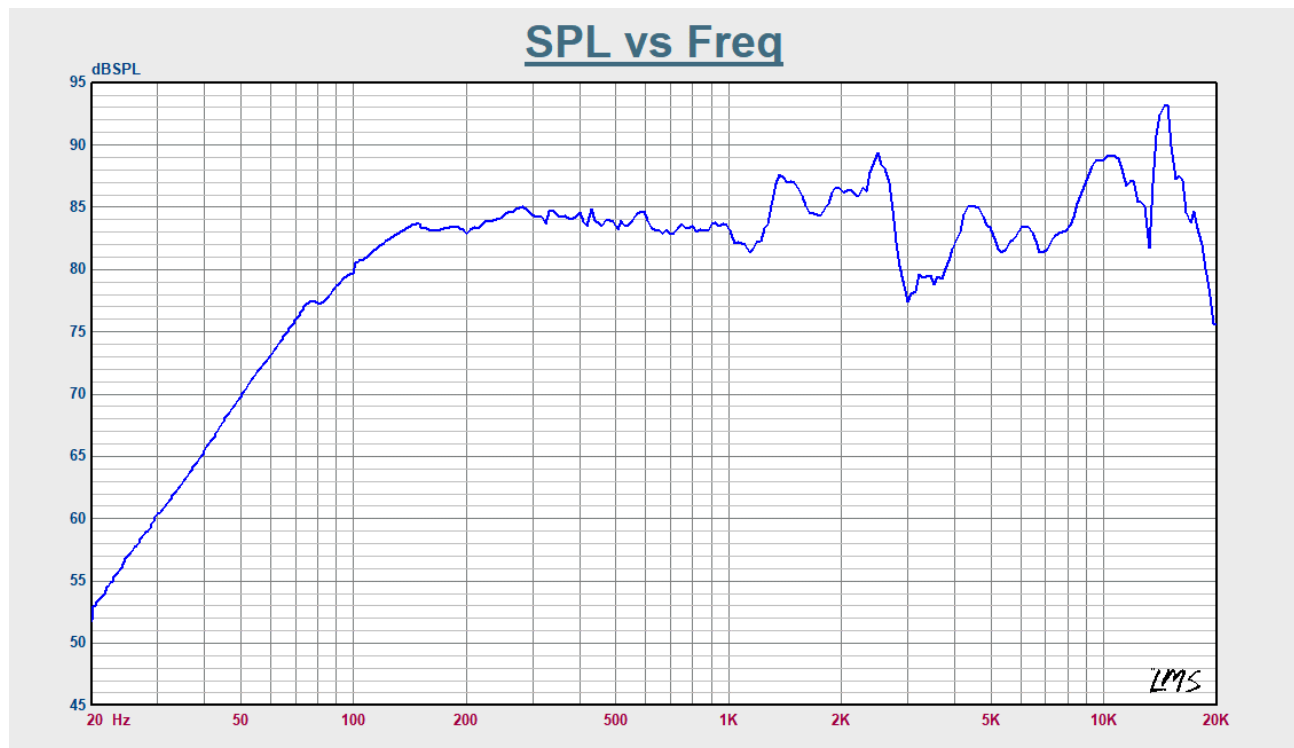

Transducer Drawing