
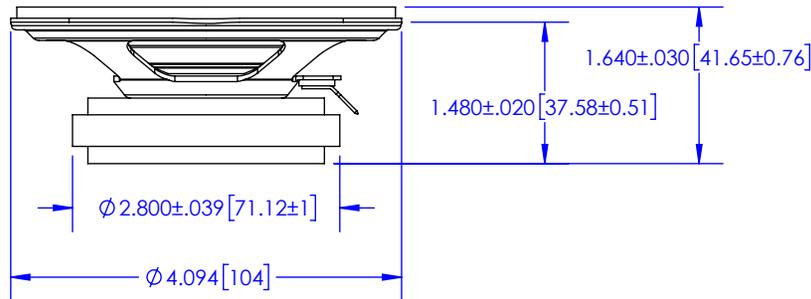
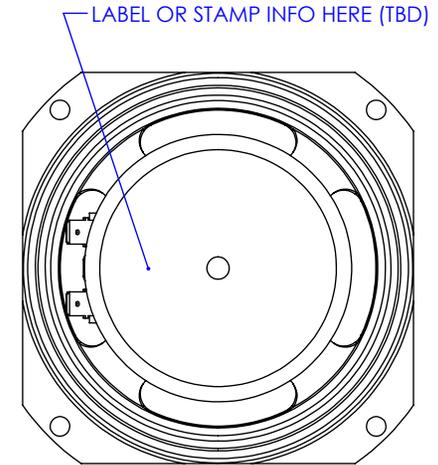
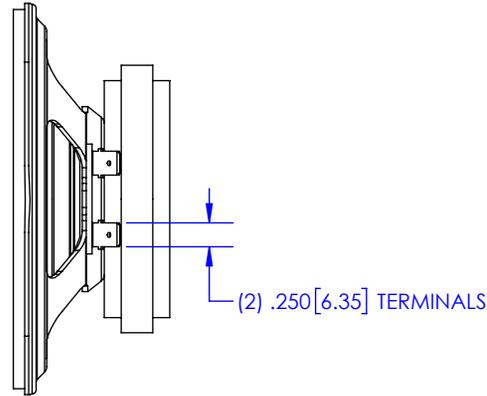


DRAWING REVISION RECORD

REV.	DESCRIPTION	DATE	APPROVED
A	PRINT APPROVED FOR PRODUCTION	3/22/24	

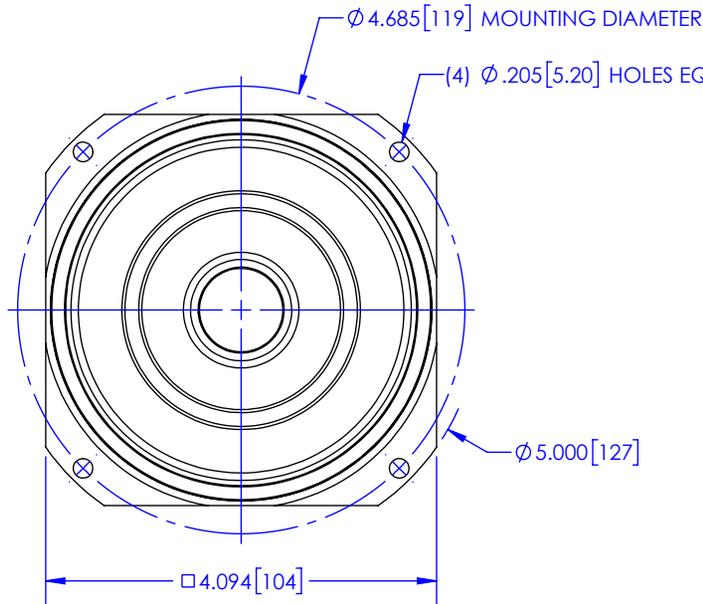

PERFORMANCE SPECIFICATIONS	
NOMINAL IMPEDANCE	8 Ohms
DCR	6.5 Ohms
RESONANT FREQUENCY	300 Hz
SENSITIVITY SPL	(2.83 V INPUT MEASURED AT 1 METER) 92 dB
FREQUENCY RESPONSE	200 - 10,000 Hz
RATED POWER	12 Watts
MAX POWER	24 Watts

NOTES:

PARTS TO BE COMPLIANT WITH MISCO Q-1016  
 ALL PARTS TO BE ROHS COMPLIANT.

MODELED/DETAILED BY: DAW	DATE 3/22/24	UNLESS OTHERWISE SPECIFIED: UNITS: INCHES (MILLIMETERS) TOLERANCES: X.XXX [X.XX] = ± 0.010 [0.25] ANGLES = ± 2° HOLES = ± 0.002 [0.05]
CHECKED BY:	DATE	
APPROVED BY:	DATE	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MISCO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MISCO IS PROHIBITED.		
MATERIAL		PER PART
FINISH		PER PART

**MISCO.**

1771 ENERGY PARK DRIVE, SUITE #400  
 ST. PAUL, MN 55108  
 PHONE #: 612-825-1010  
 FAX #: 612-825-7010

DRAWING TITLE:

**4" SPEAKER ASSEMBLY**

SIZE <b>A</b>	PART NO.: <b>N5929-1</b>	REV. <b>A</b>
------------------	-----------------------------	------------------

SCALE: 1:2

DO NOT SCALE DRAWING

SHEET 1 OF 2